

## UP


149-003-204

The slim light channel for the wall - exciting light mix, also possible with individual embossing

**Design:** linear  
**Design Version:** Wandleuchte  
**wall mounting:** available  
**surface mounting:** available  
**colour:** aluminum eloxiert  
**Width [mm]:** 80  
**Length [mm]:** 900  
**Height/depth [mm]:** 45  
**weight net [kg]:** 3,2

The clearly drawn housing of the UP wall luminaire series offers powerful light for basic lighting in different formats, with the light being directed into the room via the ceiling surface without glare. The light ceiling also creates a friendly impression of the room. At the same time, the accentuation of the wall surface creates an exciting mix of light for more atmosphere.

**Type:** LINEAR  
**light direction:** direct/indirect  
**Luminaire Luminous Flux [lm]:** 7500  
**light cover:** Acryl satined  
**light symetry:** symmetrical  
**System efficiency (lm/W):** 110  
**Colour Temperature [K]:** 4000  
**Colour Rendering Index:** >80  
**control:** ON/OFF  
**control gear incl:** 68  
**Nominal voltage:** 230V 0/50/60Hz  
**Degree of protection:** IP20  
**Protection class:** I  
**Stand:** 28.09.2022

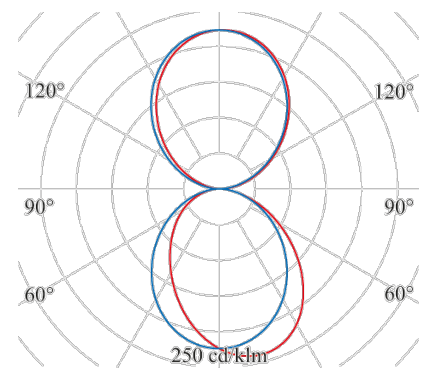

149

