

S 55




150-101-203-E

The light channel - all-rounder in linear lighting - efficient, versatile and durable

Design: linear
Design Version: Einzelleuchte
ceiling mounting: available
pendant mounting: available
track mounting: available
material: aluminum
colour: silvergrey
Width [mm]: 55
Length [mm]: 1130
Height/depth [mm]: 90
suspension: 2x Stahlseil
suspension length [mm]: 3000
weight net [kg]: 4,6

Uniquely slim, uniquely efficient and uniquely versatile, this makes the light line system an all-rounder - and ideal for lighting schools, workplaces and traffic zones.

Type: LINEAR
light direction: direct/indirect
Luminaire Luminous Flux [lm]: 4800
light cover: Acryl satined
light symetry: symmetrical
Unified Glare Ratio UGR: 21
System efficiency (lm/W): 130
Colour Temperature [K]: 3000
Colour Rendering Index: >80
control: ON/OFF
control gear incl: 37
Nominal voltage: 230V 0/50/60Hz
life cycle: 70.000h (L80/B10)
emergency ready: yes
emergency battey 3h: ja
Degree of protection: IP30
Protection class: I
control gear incl: yes

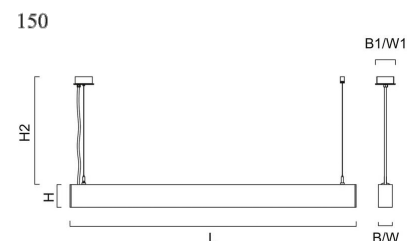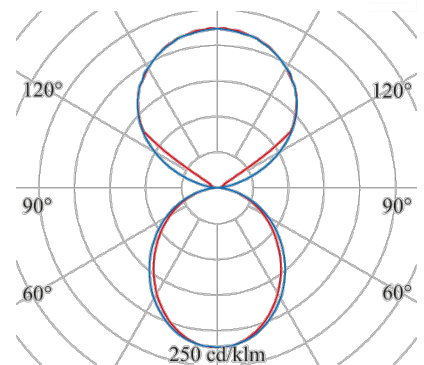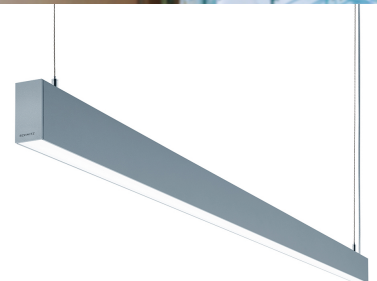

Stand: 20.05.2022