

S 55



151-103-223

The light channel - all-rounder in linear lighting - efficient, versatile and durable

Design: linear
Design Version: Einzelleuchte
wall mounting: available
surface mounting: available
material: aluminum
colour: silvergrey
Width [mm]: 55
Length [mm]: 1130
Height/depth [mm]: 90
weight net [kg]: 4

Uniquely slim, uniquely efficient and uniquely versatile, this makes the light line system an all-rounder - and ideal for lighting schools, workplaces and traffic zones.

Type: LINEAR
light direction: direct/indirect
Luminaire Luminous Flux [lm]: 5000
light cover: Acryl satined
light symetry: symmetrical
Unified Glare Ratio UGR: 21
System efficiency (lm/W): 116
Colour Temperature [K]: 3000
Colour Rendering Index: >80
control: DALI
control gear incl: 43
Nominal voltage: 230V 0/50/60Hz
life cycle: 70.000h (L80/B10)
emergency ready: yes
Degree of protection: IP30
Protection class: I
control gear incl: yes
Stand: 19.08.2022

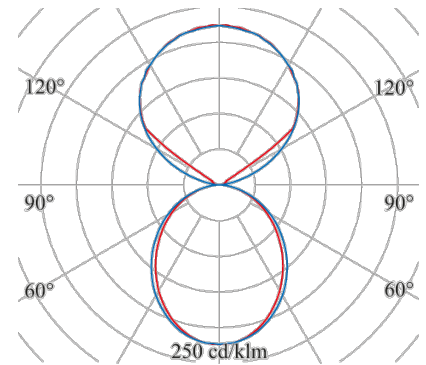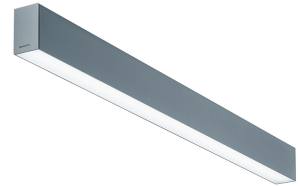

151

