

STRONG 30

S30-1113-38-27


The rail system - endless options with a filigree look and quick installation

Design: linear
 Design Version: Leuchte Pendel
 wall mounting: available
 ceiling mounting: available
 pendant mounting: available
 surface mounting: available
 track mounting: available
 colour: black
 Outer diameter [mm]: 52
 Height/depth [mm]: 200
 suspension length [mm]: 1500
 weight net [kg]: 0,389

The filigree STRONG 30 system integrates perfectly into the architecture thanks to its minimal dimensions. Despite its small dimensions, the 48V rail system impresses with its powerful and, at the same time, glare-free light for general and excellent accent lighting.


2 colours - white matt (similar to RAL 9016) or black matt (similar to RAL 9005)

Type: LINEAR
 light direction: direct
 Luminaire Luminous Flux [lm]: 1950
 light steering: Linse auswechselbar
 light symmetry: symmetrical
 Unified Glare Ratio UGR: 11
 System efficiency (lm/W): 108
 Colour Temperature [K]: 2700
 Colour Rendering Index: >90
 control: ON/OFF
 control gear incl: 18
 Nominal voltage: 48V
 life cycle: 50.000h (L80/B10)
 Degree of protection: IP20
 Protection class: III

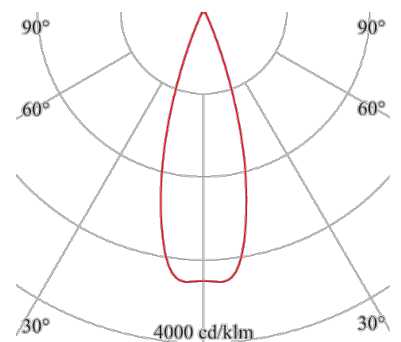

S30 h [m]	∅ [m]	Em [lx]
1,0	0,58	4289
2,0	1,17	1072
3,0	1,75	477
4,0	2,34	268
5,0	2,92	172

S30

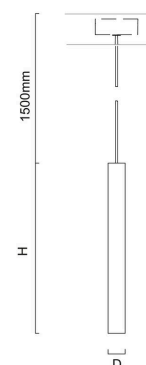

Stand: 15.08.2022

SCHMITZ | WILA

Schmitz-Leuchten GmbH & Co. KG
 Niedereimerfeld 29 D-59823 Arnsberg
 T +49 2932 96 77 0 F +49 2932 96 77 77

SCHMITZ | WILA is continuously improving its products in terms of performance, material and quality. The current and warranty-relevant product information can therefore differ from the statements presented here.

www.schmitz-wila.com