

SIRO


SR1567315-33-42-DD

The cylindrical luminaire with the high quality of light in a minimalist design

Design: cylindrical
ceiling mounting: available
pendant mounting: available
colour: white RAL 9016
Outer diameter [mm]: 80
Height/depth [mm]: 390
suspension length [mm]: 1500
weight net [kg]: 1,5

The filigree pendant and surface-mounted luminaires offer perfect light for accentuating lighting tasks. The slim design and a variety of color combination allow the restrained integration into any architecture. Thanks to the integrated control gear, the direct and indirect components of the SIRO luminaires can be switched separately.

Type: POINT
light direction: direct/indirect
Luminaire Luminous Flux [lm]: 1820
light steering: reflector
light symetry: symmetrical
Unified Glare Ratio UGR: 10
System efficiency (lm/W): 96
Colour Temperature [K]: 4000
Colour Rendering Index: >83
control: DALI
control gear incl: 19
Nominal voltage: 230V 0/50/60Hz
life cycle: 50.000h (L70/B0/F0)
Degree of protection: IP20
Protection class: I

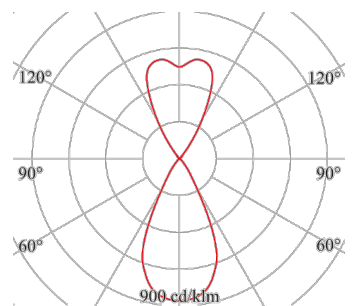

SR156		
h [m]	Ø [m]	Em [lx]
1,0	0,95	961
2,0	1,90	240
3,0	2,85	107
4,0	3,80	60
5,0	4,75	38

SR1567315-33-42-DD

