

UP


149-003-204

The slim light channel for the wall - exciting light mix, also possible with individual embossing

Design: linear
Design Version: Wandleuchte
wall mounting: available
surface mounting: available
colour: aluminum eloxiert
Width [mm]: 80
Length [mm]: 900
Height/depth [mm]: 45
weight net [kg]: 3,2

The clearly drawn housing of the UP wall luminaire series offers powerful light for basic lighting in different formats, with the light being directed into the room via the ceiling surface without glare. The light ceiling also creates a friendly impression of the room. At the same time, the accentuation of the wall surface creates an exciting mix of light for more atmosphere.

Type: LINEAR
light direction: direct/indirect
Luminaire Luminous Flux [lm]: 7500
light cover: Acryl satined
light symetry: symmetrical
System efficiency (lm/W): 110
Colour Temperature [K]: 4000
Colour Rendering Index: >80
control: ON/OFF
control gear incl: 68
Nominal voltage: 230V 0/50/60Hz
Degree of protection: IP20
Protection class: I
Stand: 28.09.2022

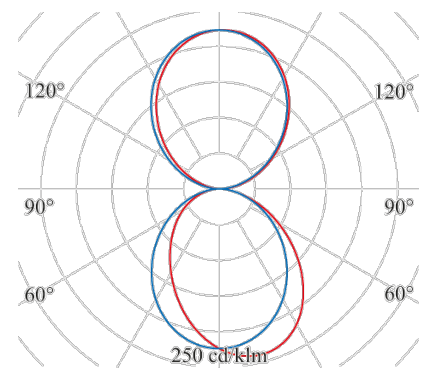

149

