

## S 55




150-101-203-E

The light channel - all-rounder in linear lighting - efficient, versatile and durable

**Design:** linear  
**Design Version:** Einzelleuchte  
**ceiling mounting:** available  
**pendant mounting:** available  
**track mounting:** available  
**material:** aluminum  
**colour:** silvergrey  
**Width [mm]:** 55  
**Length [mm]:** 1130  
**Height/depth [mm]:** 90  
**suspension:** 2x Stahlseil  
**suspension length [mm]:** 3000  
**weight net [kg]:** 4,6

Uniquely slim, uniquely efficient and uniquely versatile, this makes the light line system an all-rounder - and ideal for lighting schools, workplaces and traffic zones.

**Type:** LINEAR  
**light direction:** direct/indirect  
**Luminaire Luminous Flux [lm]:** 4800  
**light cover:** Acryl satined  
**light symetry:** symmetrical  
**Unified Glare Ratio UGR:** 21  
**System efficiency (lm/W):** 130  
**Colour Temperature [K]:** 3000  
**Colour Rendering Index:** >80  
**control:** ON/OFF  
**control gear incl:** 37  
**Nominal voltage:** 230V 0/50/60Hz  
**life cycle:** 70.000h (L80/B10)  
**emergency ready:** yes  
**emergency battey 3h:** ja  
**Degree of protection:** IP30  
**Protection class:** I  
**control gear incl:** yes  
**control gear:** CC

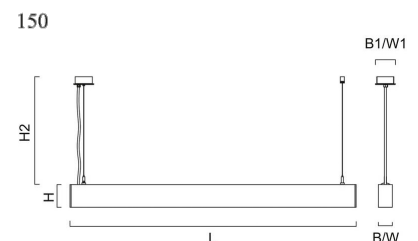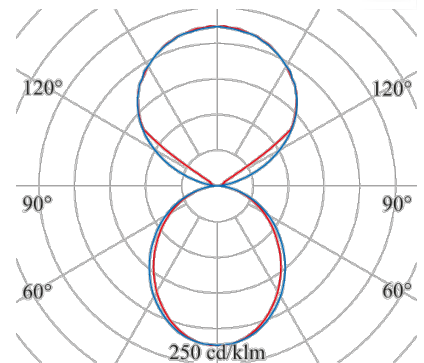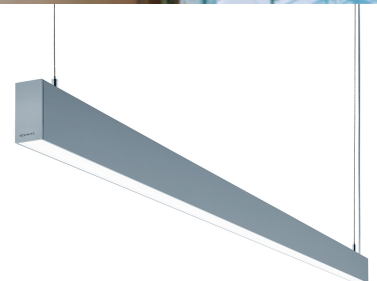

Stand: 20.05.2022