

ALPHABET SPECTRA

AS-11260-12-40


The downlight for accent lighting of the highest quality in demanding lighting tasks

Design: round
Design Version: Reflektor 60°
ceiling mounting: available
recessed mounting: available
colour: white
Outer diameter [mm]: 102
Cut-out [mm]: 95
Installation Depth [mm]: 95
weight net [kg]: 0,5

ALPHABET SPECTRA relies on high colour rendering in daylight quality as standard. The difference in quality is particularly clear in the red area R9. In addition, with 2 SDCM (Standard Deviation of Color Matching), WILA currently offers the greatest colour homogeneity.

TAILOR MADE - Let's design colour rendering, half-beam angle, housing colour, reflector colour and light colour, individually. Ball-throw or splash-proof lights are just as possible as exhaust air functions or the like.

Type: POINT
light direction: direct
Luminaire Luminous Flux [lm]: 1180
light steering: Reflektor hochglanzsilber
light symetry: symmetrical
beam angles: 60°
Unified Glare Ratio UGR: 18
Luminous intensity (cd/m²): <1000
System efficiency (lm/W): 84
Colour Temperature [K]: 4000
Colour Rendering Index: >98
control: DALI
control gear incl: 14
Nominal voltage: 230V 0/50/60Hz
life cycle: 50.000h (L80/B10)
emergency ready: ja
Type of wiring: available für DV
Degree of protection: IP20
Protection class: II
control gear incl: yes
control gear: CC
Stand: 16.05.2022

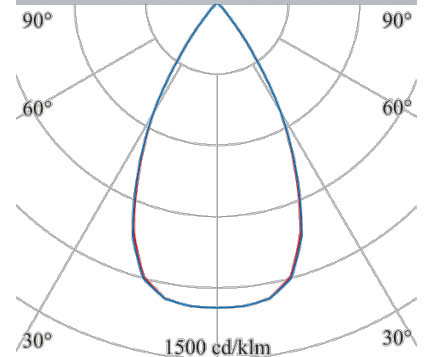

AS-11260-12		
h [m]	Ø [m]	Em [lx]
1,0	1,06 / 1,06	999
2,0	2,12 / 2,13	250
3,0	3,18 / 3,19	111
4,0	4,24 / 4,25	62
5,0	5,29 / 5,32	40

AS-11260-12-40

