

ALPHABET SPECTRA

AS-14360-12-40

The downlight for accent lighting of the highest quality in demanding lighting tasks


Design: round
Design Version: Reflektor & Streuscheibe 60°
ceiling mounting: available
recessed mounting: available
colour: white
Outer diameter [mm]: 127
Cut-out [mm]: 120
Installation Depth [mm]: 150
weight net [kg]: 1,2

ALPHABET SPECTRA relies on high colour rendering in daylight quality as standard. The difference in quality is particularly clear in the red area R9. In addition, with 2 SDCM (Standard Deviation of Color Matching), WILA currently offers the greatest colour homogeneity.

TAILOR MADE - Let's design colour rendering, half-beam angle, housing colour, reflector colour and light colour, individually. Ball-throw or splash-proof lights are just as possible as exhaust air functions or the like.

Type: POINT
light direction: direct
Luminaire Luminous Flux [lm]: 2730
light steering: Reflektor & Streuscheibe
light symetry: symmetrical
beam angles: 60°
System efficiency (lm/W): 80
Colour Temperature [K]: 4000
Colour Rendering Index: >83
control: DALI
control gear incl: 37
Nominal voltage: 230V 0/50/60Hz
life cycle: 50.000h (L80/B10)
emergency ready: ja
Type of wiring: available für DV
Degree of protection: IP20
Protection class: II
control gear incl: yes
control gear: CC

Stand: 16.05.2022

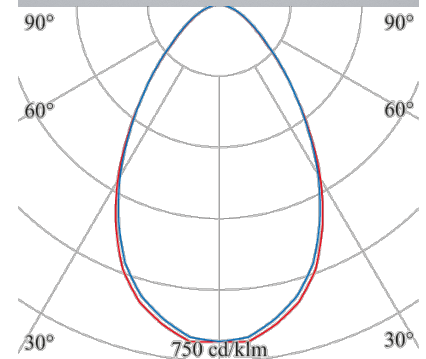

AS-14360-12		
h [m]	∅ [m]	Em [lx]
1,0	1,32 / 1,35	1088
2,0	2,65 / 2,70	272
3,0	3,97 / 4,05	121
4,0	5,30 / 5,40	68
5,0	6,62 / 6,75	44

AS-14360-12-40

