

## STRONG 30

S30-1101-38-40


The rail system - endless options with a filigree look and quick installation

Design: linear  
 Design Version: Pendelleuchte  
 wall mounting: available  
 ceiling mounting: available  
 pendant mounting: available  
 surface mounting: available  
 track mounting: available  
 colour: black  
 Outer diameter [mm]: 30  
 Height/depth [mm]: 300  
 suspension length [mm]: 1500  
 weight net [kg]: 0,45


The filigree STRONG 30 system integrates perfectly into the architecture thanks to its minimal dimensions. Despite its small dimensions, the 48V rail system impresses with its powerful and, at the same time, glare-free light for general and excellent accent lighting.

2 colours - white matt (similar to RAL 9016) or black matt (similar to RAL 9005)

Type: LINEAR  
 light direction: direct  
 Luminaire Luminous Flux [lm]: 670  
 light steering: lens  
 light symmetry: symmetrical  
 Unified Glare Ratio UGR: 20  
 System efficiency (lm/W): 84  
 Colour Temperature [K]: 4000  
 Colour Rendering Index: >90  
 control: ON/OFF  
 control gear incl: 8  
 Nominal voltage: 48V  
 life cycle: 50.000h (L80/B10)  
 Degree of protection: IP20  
 Protection class: I

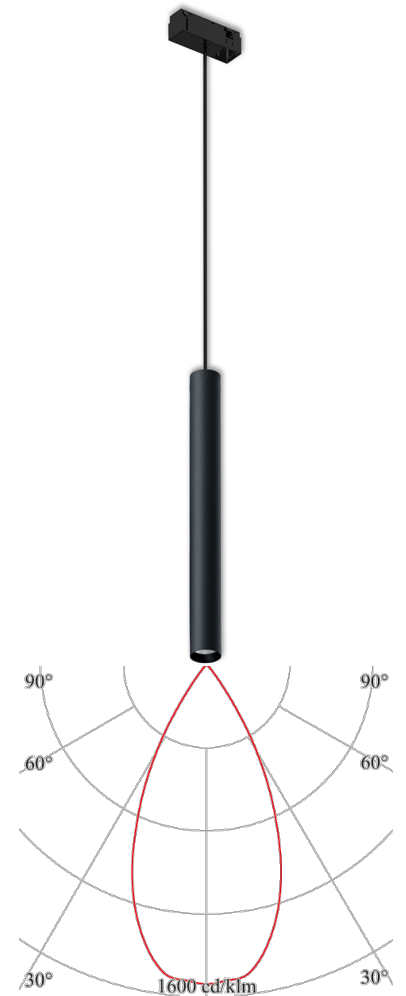

S30 h [m]	∅ [m]	Em [lx]
1,0	0,93	604
2,0	1,86	151
3,0	2,79	67
4,0	3,71	38
5,0	4,64	24

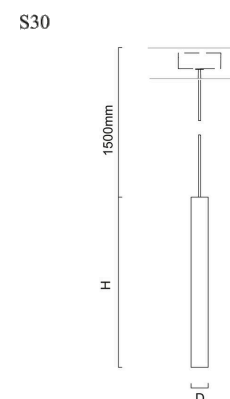

Stand: 14.08.2022

SCHMITZ | WILA

Schmitz-Leuchten GmbH & Co. KG  
 Niedereimerfeld 29 D-59823 Arnsberg  
 T +49 2932 96 77 0 F +49 2932 96 77 77

SCHMITZ | WILA is continuously improving its products in terms of performance, material and quality. The current and warranty-relevant product information can therefore differ from the statements presented here.

[www.schmitz-wila.com](http://www.schmitz-wila.com)