

# STRONG 30

S30-1202-18-27

The rail system - endless options with a filigree look and quick installation


**Design:** linear  
**Design Version:** Leuchte Spot  
**wall mounting:** available  
**ceiling mounting:** available  
**pendant mounting:** available  
**surface mounting:** available  
**track mounting:** available  
**colour:** white  
**Outer diameter [mm]:** 52  
**Height/depth [mm]:** 90  
**weight net [kg]:** 0,205

The filigree STRONG 30 system integrates perfectly into the architecture thanks to its minimal dimensions. Despite its small dimensions, the 48V rail system impresses with its powerful and, at the same time, glare-free light for general and excellent accent lighting.

2 colours - white matt (similar to RAL 9016) or black matt (similar to RAL 9005)

**Type:** LINEAR  
**light direction:** direct  
**Luminaire Luminous Flux [lm]:** 1450  
**light steering:** dreh- und schwenkbar  
**light symetry:** symmetrical  
**beam angles:** 30°  
**Unified Glare Ratio UGR:** 10  
**System efficiency (lm/W):** 112  
**Colour Temperature [K]:** 2700  
**Colour Rendering Index:** >90  
**control:** ON/OFF  
**control gear incl:** 13  
**Nominal voltage:** 48V  
**life cycle:** 50.000h (L80/B10)  
**Degree of protection:** IP20  
**Protection class:** III

Stand: 15.08.2022

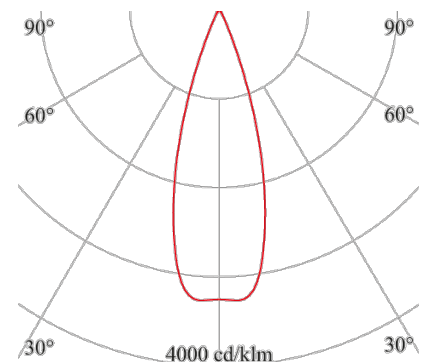

S30 h [m]	Ø [m]	Em [lx]
1,0	0,58	3163
2,0	1,17	791
3,0	1,75	351
4,0	2,34	198
5,0	2,92	127

