

STRONG 30

S30-1202-38-40

The rail system - endless options with a filigree look and quick installation


Design: linear
Design Version: Strahler
wall mounting: available
ceiling mounting: available
pendant mounting: available
surface mounting: available
track mounting: available
colour: black
Outer diameter [mm]: 52
Height/depth [mm]: 147
weight net [kg]: 0,205

The filigree STRONG 30 system integrates perfectly into the architecture thanks to its minimal dimensions. Despite its small dimensions, the 48V rail system impresses with its powerful and, at the same time, glare-free light for general and excellent accent lighting.

2 colours - white matt (similar to RAL 9016) or black matt (similar to RAL 9005)

Type: LINEAR
light direction: direct
Luminaire Luminous Flux [lm]: 1320
light steering: dreh- und schwenkbar
light symetry: symmetrical
beam angles: 30°
Unified Glare Ratio UGR: 10
System efficiency (lm/W): 94
Colour Temperature [K]: 4000
Colour Rendering Index: >90
control: ON/OFF
control gear incl: 14
Nominal voltage: 48V
life cycle: 50.000h (L80/B10)
Degree of protection: IP20
Protection class: I

Stand: 14.08.2022

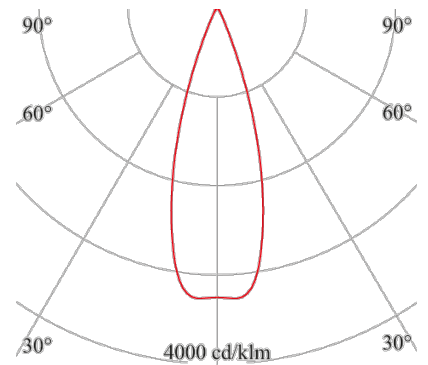

| S30 h [m] | Ø [m] | Em [lx] |
|--------------|-------|---------|
| 1,0 | 0,58 | 3163 |
| 2,0 | 1,17 | 791 |
| 3,0 | 1,75 | 351 |
| 4,0 | 2,34 | 198 |
| 5,0 | 2,92 | 127 |

