

STRONG 30

S30-1204-38-30


The rail system - endless options with a filigree look and quick installation

Design: linear
Design Version: Leuchte Spot
wall mounting: available
ceiling mounting: available
pendant mounting: available
surface mounting: available
track mounting: available
colour: black
Outer diameter [mm]: 95
Height/depth [mm]: 33
weight net [kg]: 0,27

The filigree STRONG 30 system integrates perfectly into the architecture thanks to its minimal dimensions. Despite its small dimensions, the 48V rail system impresses with its powerful and, at the same time, glare-free light for general and excellent accent lighting.

2 colours - white matt (similar to RAL 9016) or black matt (similar to RAL 9005)

Type: LINEAR
light direction: direct
Luminaire Luminous Flux [lm]: 1450
light steering: dreh- und schwenkbar
light symmetry: symmetrical
beam angles: 24°
Unified Glare Ratio UGR: 19
System efficiency (lm/W): 112
Colour Temperature [K]: 3000
Colour Rendering Index: >90
control: ON/OFF
control gear incl: 13
Nominal voltage: 48V
life cycle: 50.000h (L80/B10)
Degree of protection: IP20
Protection class: III
Stand: 19.08.2022

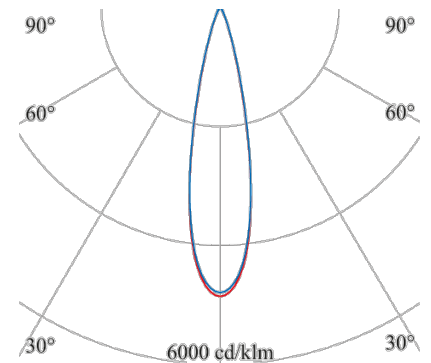

S30- h [m]	∅ [m]	Em [lx]
1,0	0,39 / 0,41	4160
2,0	0,78 / 0,82	1040
3,0	1,17 / 1,23	462
4,0	1,56 / 1,64	260
5,0	1,94 / 2,05	166

S30

