

## SIRO


SR1567315-33-42-DD

The cylindrical luminaire with the high quality of light in a minimalist design

**Design:** cylindrical  
**ceiling mounting:** available  
**pendant mounting:** available  
**colour:** white RAL 9016  
**Outer diameter [mm]:** 80  
**Height/depth [mm]:** 390  
**suspension length [mm]:** 1500  
**weight net [kg]:** 1,5

The filigree pendant and surface-mounted luminaires offer perfect light for accentuating lighting tasks. The slim design and a variety of color combination allow the restrained integration into any architecture. Thanks to the integrated control gear, the direct and indirect components of the SIRO luminaires can be switched separately.

**Type:** POINT  
**light direction:** direct/indirect  
**Luminaire Luminous Flux [lm]:** 1820  
**light steering:** reflector  
**light symetry:** symmetrical  
**Unified Glare Ratio UGR:** 10  
**System efficiency (lm/W):** 96  
**Colour Temperature [K]:** 4000  
**Colour Rendering Index:** >83  
**control:** DALI  
**control gear incl:** 19  
**Nominal voltage:** 230V 0/50/60Hz  
**life cycle:** 50.000h (L70/B0/F0)  
**Degree of protection:** IP20  
**Protection class:** I

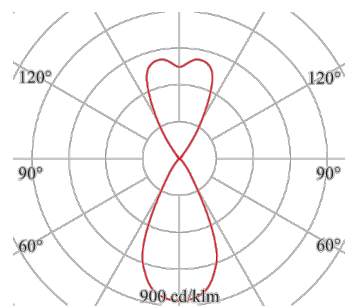

SR156		
h [m]	Ø [m]	Em [lx]
1,0	0,95	961
2,0	1,90	240
3,0	2,85	107
4,0	3,80	60
5,0	4,75	38

SR1567315-33-42-DD

